

Distance Sensor


U1KT001

Part Number



- 2 mutually independent switching outputs
- Miniature design
- Ready for Industrie 4.0 with IO-Link version 1.1
- Reflex and through-beam operation mode are possible

These ultrasonic sensors evaluate the sound reflected from the object. They detect almost any object regardless of the material and its condition. They are therefore especially well suited for monitoring fill levels of liquids and bulk goods and for detecting transparent objects. The measured value can be read out via IO-Link, and the sensor can be optimally adapted to the application. The sensor can be used in reflex mode operation and as an ultrasonic through-beam sensor.

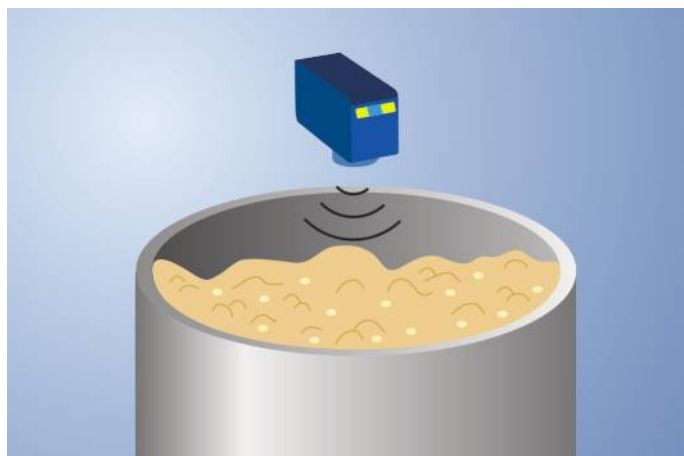

Technical Data

Ultrasonic Data

Working range, reflex sensor	30...400 mm
Working range, through-beam sensor	1...800 mm
Setting Range	30...400 mm
Reproducibility maximum	4 mm
Linearity Deviation	4 mm
Resolution	0,5 mm
Ultrasonic Frequency	325 kHz
Opening Angle	< 12 °
Service Life (T = +25 °C)	100000 h
Switching Hysteresis	2 mm
Switching Hysteresis	1 % *

Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 20 mA
Switching frequency, reflex sensor	30 Hz
Switching frequency, through-beam sensor	70 Hz
Response time, reflex sensor	17 ms
Response time, through-beam sensor	8 ms
Temperature Range	-30...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2,5 V
Switching Output/Switching Current	100 mA
Synchronous Mode	up to 40 sensors
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Interface	IO-Link V1.1
Data Storage	yes
Protection Class	III

Mechanical Data

Setting Method	Teach-In
Housing Material	Plastic
Degree of Protection	IP68
Connection	M8 × 1; 4-pin

Safety-relevant Data


MTTFd (EN ISO 13849-1)	1106,71 a
PNP NO	●
Programmable error output	●
IO-Link	●

Connection Diagram No.	259
Control Panel No.	A23
Suitable Connection Equipment No.	7
Suitable Mounting Technology No.	400

* Referring to the switching distance, at least 2 mm.


Complementary Products

IO-Link Master
Software

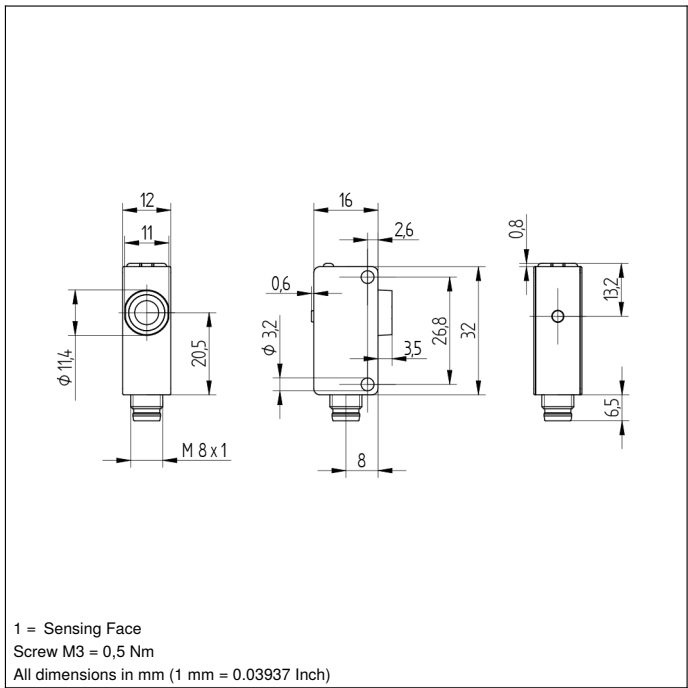


Ctrl. Panel

A 23



06 = Teach Button
5a = Switching Status Display, O1
68 = supply voltage indicator
6a = Switching Status Display, O2

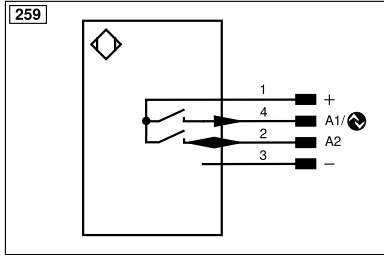


Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
Ū	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring
PT	Platinum measuring resistor	ENARIS422	Encoder A/Ā (TTL)
		ENBRIS422	Encoder B/B̄ (TTL)
		ENA	Encoder A
		ENB	Encoder B
		AMIN	Digital output MIN
		AMAX	Digital output MAX
		ACK	Digital output OK
		SY In	Synchronization In
		SY OUT	Synchronization OUT
		OLT	Brightness output
		M	Maintenance
		rsv	Reserved
		Wire Colors according to DIN IEC 60757	
		BK	Black
		BN	Brown
		RD	Red
		OG	Orange
		YE	Yellow
		GN	Green
		BU	Blue
		VT	Violet
		GY	Grey
		WH	White
		PK	Pink
		GNYE	Green/Yellow

Characteristic response curve

Characteristic curves show the position of the center of the measured object (100 × 100 mm plate) at the time of switching.

U1KT

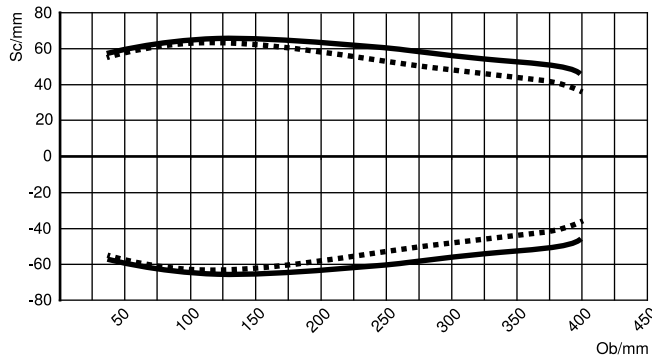

Ob = Object
Sc = Sonic cone width

— Standard
- - - Narrow

Specifications are subject to change without notice

