

Quadro-Profile

3100.8000F

Functional description of the system

The evaluation electronics monitor the safety strip, which is equipped with a terminating resistor and operates using the closed circuit principle. An amount of current defined by the resistance (8.2 kΩ) flows through the safety strip. When mechanical pressure causes the resistance in the safety strip to drop below 5.5 kΩ, this is recognised as an actuation (evaluation electronics: LED RED). When contact resistance or a broken cable raises the resistance in the safety strip above 11.5 kΩ, this condition is recognised as a broken cable and/or fault (evaluation electronics: LED YELLOW). In both cases, the system stops (evaluation electronics: safety relays K1 and K2 open).




Quadro-Profile 3100.8000F

Quadro-Profile	
Article no.	3100.8000F
Material	EPDM
Weight	0.473 kg/m
Shore hardness	Conductive mixture: 65 +/-5 Shore A Non-conductive mixture: 60 +/-5 Shore A
Interconnection	Series connection electr. max. 10 switching strips
Min. and max. length of the switching strip	0.1 m to 100 m
Storage temperature	-10°C to +15°C respectively +25°C (DIN 7716)
Delivery length	20 m
Response time of the evaluation electronics	< 12 ms

Certified characteristic data	
Actuation angle (α)	+/-180°
Ineffective border area	0 mm
Finger safety	no
Max. operating speed	200 mm/s
Climatic conditions	-10°C to 55°C
Level of protection	IP67
Number of switching cycles	> 10,000 Switching cycles

Profile cross-section
Quadro-Profile 3100.8000F

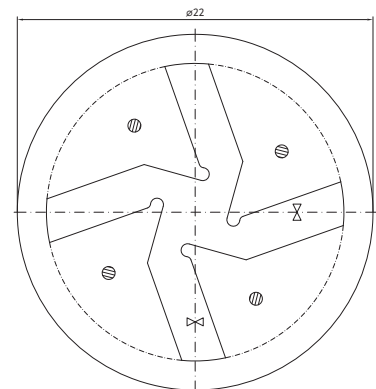

For dimensions without tolerance particulars, tolerance-free dimensions as per DIN ISO 3302-1 E2 shall apply.

You can choose any of several different variants for compatible evaluation signals (Category 1/PL c and Category 3/PL e, SIL3).