



SS - SP series

M18 DC with lateral adjustment



features

- Models with side sens. adjustment on axial and right angle optic
- LO/DO selectable output
- ATEX models, cat. 3, available on request
- LED status indicator for all versions
- Complete protection against electrical damages
- IP67 protection degree for all models
- Approvals: CE and cULus listed

web contents

- Application notes
- Photos
- Catalogue / Manuals



M18 DC with lateral adjustment



code description (*)

background suppression

SS 0 / 0 N - 0 A

series	SS	M18 photoelectric sensors with axial optic
type	0	50 mm background suppr. without sens. adjust.
	1	100 mm background suppr. without sens. adjust.
	T	Focalizer background suppr. 12 mm (with focalizer STF-12) - 25 mm (with focalizer STF-25)
output	0	LO/DO selectable output
	L	3 wires – light on
	D	3 wires – dark on
NPN / PNP output	N	NPN output
	P	PNP output
housing material	0	Plastic housing
	1	Metallic housing
cable / plug exit	A	Axial cable exit 2 m
	E	M12 plug cable exit

(*) ATEX models available, contact our Sales Dept. for further information.



code description

diffuse reflection and retro-reflective

SS 2 / 0 N - 0 A

series	SS	M18 photoelectric sensors with axial optic
	SP	M18 photoelectric sensors with right angle optic
type	2	100 mm diffuse reflection without sens. adjust.
	3	100 mm diffuse reflection with sens. adjust.
	7	400 mm diffuse reflection with sens. adjust.
	8	800 mm diffuse reflection with sens. adjust.
	C	5 m retro-reflective without sens. adjust. ⁽¹⁾
	P	4 m polarized retro-reflective without sens. adjust. ⁽¹⁾
output	0	LO/DO selectable output
	L	3 wires - light on
	D	3 wires - dark on
NPN / PNP output	N	NPN output
	P	PNP output
housing material	0	Plastic housing
	1	Metallic housing
cable / plug output	A	Axial cable exit
	E	M12 plug cable exit
		Standard version
	3X	Retro-reflective and polarized with sens. adjust.

⁽¹⁾ Special version with sens. adjust, 3X variant

code description

through beam

SS H / 0 0 - 0 A

series	SS	M18 photoelectric sensors with axial optic
	SP	M18 photoelectric sensors with right angle optic
type	H	14 m emitter without sens. adjust.
	Z	14 m receiver without sens. adjust.
	D	14 m receiver with sens. adjust.
	U	Emitter with reduced visible beam
	G	8 m receiver for small object
	V	3 m receiver for ultra small object
features	0	Emitter without check - LO/DO selectable
	X	Emitter with check
	L	3 wires - light on - S*D and S*Z only
	D	3 wires-dark on - S*D and S*Z only
	A	3 wires - light on - S*G and S*V only
	C	3 wires-dark on - S*G and S*V only
NPN / PNP output	0	Emitter
	N	NPN output
	P	PNP output
housing material	0	Plastic housing
	1	Metallic housing
cable / plug exit	A	Axial cable exit
	E	M12 plug cable exit - S*H, S*D and S*Z" versions only
	H	M12 plug cable exit - S*U, S*G and S*V versions only

available models

plug exit photoelectric sensors axial optic

function	distance	housing	adjustment	3 wires LO NPN	3 wires LO PNP	3 wires DO NPN	3 wires DO PNP	3 wires NPN LO / DO	3 wires PNP LO / DO
background suppression	50 mm	plastic	-	-	SS0/LP-0E	-	-	SS0/0N-0E	SS0/0P-0E
		metallic		-	SS0/LP-1E	-	-	SS0/0N-1E	SS0/0P-1E
	100 mm	plastic		-	SS1/LP-0E	-	-	SS1/0N-0E	SS1/0P-0E
		metallic		-	SS1/LP-1E	-	-	SS1/0N-1E	SS1/0P-1E
	focalized	plastic		-	-	-	-	SST/0N-0E	SST/0P-0E
		metallic		-	-	-	-	SST/0N-1E	SST/0P-1E
diffuse reflection	100 m	plastic	●	SS2/LN-0E	SS2/LP-0E	-	-	SS2/0N-0E	SS2/0P-0E
				-	-	-	-	-	-
		metallic	-	SS2/LN-1E	SS2/LP-1E	-	-	SS2/0N-1E	SS2/0P-1E
				-	-	-	-	-	SS3/0P-1E
	400 mm	plastic	●	-	SS7/LP-0E	-	-	SS7/0N-0E	SS7/0P-0E
		metallic		-	SS7/LP-1E	-	-	SS7/0N-1E	SS7/0P-1E
	800 mm	plastic		-	-	-	-	-	SS8/0P-0E
		metallic		-	-	-	-	-	SS8/0P-1E
retro-reflective	4 m	plastic	-	SSC/LN-0E	SSC/LP-0E	SSC/DN-0E	SSC/DP-0E	SSC/0N-0E	SSC/0P-0E
			●	-	-	-	-	SSC/0N-0E3X	SSC/0P-0E3X
		metallic	-	SSC/LN-1E	SSC/LP-1E	SSC/DN-1E	SSC/DP-1E	SSC/0N-1E	SSC/0P-1E
			●	-	-	-	-	SSC/0N-1E3X	SSC/0P-1E3X
polarized	3 m	plastic	-	SSP/LN-0E	SSP/LP-0E	SSP/DN-0E	SSP/DP-0E	SSP/0N-1E	SSP/0P-1E
			●	-	-	-	-	SSP/0N-1E3X	SSP/0P-1E3X
		metallic	-	SSP/LN-1E	SSP/LP-1E	SSP/DN-1E	SSP/DP-1E	SSP/0N-1E	SSP/0P-1E
			●	-	-	-	-	SSP/0N-1E3X	SSP/0P-1E3X
through-beam	14 m	plastic	emitter	SSH/00-0E					
			em. with check	SSH/X0-0E					
			receiver	SSZ/LN-0E	SSZ/LP-0E	SSZ/DN-0E	SSZ/DP-0E	SSZ/0N-0E	SSZ/0P-0E
			receiver adj.	SSD/LN-0E	SSD/LP-0E	SSD/DN-0E	SSD/DP-0E	SSD/0N-0E	SSD/0P-0E
		metallic	emitter	SSH/00-1E					
			em. with check	SSH/X0-1E					
			receiver	SSZ/LN-1E	SSZ/LP-1E	SSZ/DN-1E	SSZ/DP-1E	SSZ/0N-1E	SSZ/0P-1E
			receiver adj.	SSD/LN-1E	SSD/LP-1E	SSD/DN-1E	SSD/DP-1E	SSD/0N-1E	SSD/0P-1E
	8 m	plastic	emitter	SSU/00-0E					
			receiver	SSG/AN-0E	SSG/AP-0E	SSG/CN-0E	SSG/CP-0E	-	-
		metallic	emitter	SSU/00-1H					
			receiver	SSG/AN-1H	SSG/AP-1H	SSG/CN-1E	SSG/CP-1H	-	-
	3 m	plastic	emitter	SSU/00-0E					
			receiver	SSV/AN-0E	SSV/AP-0E	SSV/CN-0E	SSV/CP-0E	-	-
		metallic	emitter	SSU/00-1H					
			receiver	-					

M18 DC with lateral
adjustment

SS - SP



available models

cable exit photoelectric sensors axial optic

M18 DC with lateral
adjustment

function	distance	housing	adjustment	3 wires LO NPN	3 wires LO PNP	3 wires DO NPN	3 wires DO PNP	4 wires NPN LO / DO	4 wires PNP LO / DO
background suppression	50 mm	plastic	-	-	-	-	-	SS0/0N-0A	SS0/0P-0A
		metallic		-	-	-	-	SS0/0N-1A	SS0/0P-1A
	100 mm	plastic		-	-	-	-	SS1/0N-0A	SS1/0P-0A
		metallic		-	-	-	-	SS1/0N-1A	SS1/0P-1A
	focalizzata	plastic		-	-	-	-	SST/0N-0A	SST/0P-0A
		metallic		-	-	-	-	SST/0N-1A	SST/0P-1A
diffuse reflection	100 m	plastic	●	SS2/LN-0A	SS2/LP-0A	-	SS2/DP-0A	SS2/0N-0A	SS2/0P-0A
		metallic	-	-	-	-	-	SS3/0N-0A	SS3/0P-0A
	400 mm	plastic	●	SS2/LN-1A	SS2/LP-1A	SS2/DN-1A	SS2/DP-1A	SS2/0N-1A	SS2/0P-1A
		metallic		-	-	-	-	SS3/0N-1A	SS3/0P-1A
	800 mm	plastic	●	-	-	-	-	SS7/0N-0A	SS7/0P-0A
		metallic		-	-	-	-	SS7/0N-1A	SS7/0P-1A
	800 mm	plastic	●	-	-	-	-	SS8/0N-0A	SS8/0P-0A
		metallic		-	-	-	-	SS8/0N-1A	SS8/0P-1A
retro-reflective	5 m	plastic	-	-	-	-	-	SSC/0N-0A	SSC/0P-0A
		metallic	●	-	-	-	-	SSC/0N-0A3X	SSC/0P-0A3X
		metallic	-	-	-	-	-	SSC/0N-1A	SSC/0P-1A
		metallic	●	-	-	-	-	SSC/0N-1A3X	SSC/0P-1A3X
polarized	4 m	plastic	-	-	-	-	SSP/DP-0A	SSP/0N-1A	SSP/0P-1A
		metallic	●	-	-	-	-	SSP/0N-1A3X	SSP/0P-1A3X
		metallic	-	-	-	-	SSP/DP-1A	SSP/0N-1A	SSP/0P-1A
		metallic	●	-	-	-	-	SSP/0N-1A3X	SSP/0P-1A3X
through-beam	14 m	plastic	emitter	SSH/00-0A					
			em. with check	SSH/X0-0A					
			receiver	SSZ/LN-0A	SSZ/LP-0A	SSZ/DN-0A	SSZ/DP-0A	SSZ/0N-0A	SSZ/0P-0A
			receiver adj.	-	-	-	-	SSD/0N-0A	SSD/0P-0A
		metallic	emitter	SSH/00-1A					
			em. with check	SSH/X0-1A					
			receiver	-	-	-	-	SSZ/0N-1E	SSZ/0P-1E
			receiver adj.	-	-	-	-	SSD/0N-1E	SSD/0P-1E
	8 m	plastic	emitter	SSU/00-0A					
			receiver	S SG/AN-0A	S SG/AP-0A	S SG/CN-0A	S SG/CP-0A	-	-
		metallic	emitter	SSU/00-1A					
			em. with check	SSU/X0-1A					
	3 m	plastic	receiver	S SG/AN-1A	S SG/AP-1A	S SG/CN-1A	S SG/CP-1A	-	-
			emitter	SSU/00-0A					
		metallic	em. with check	SSU/X0-0A					
			receiver	-	SSV/AP-0A	-	-	-	-
		metallic	emitter	SSU/00-1A					
			receiver	-	SSV/AP-1A	-	-	-	-

available models

plug exit photoelectric sensors radial optic

function	distance	housing	adjustment	3 wires LO NPN	3 wires LO PNP	3 wires DO NPN	3 wires DO PNP	4 wires NPN LO/DO	4 wires PNP LO/DO
diffuse reflection	100 mm	plastic	-	SP2/LN-0E	SP2/LP-0E	-	-	SP2/0N-0E	SP2/0P-0E
			●	-	-	-	-	-	SP3/0P-0E
		metallic	-	SP2/LN-1E	SP2/LP-1E	-	-	SP2/0N-1E	SP2/0P-1E
			●	-	-	-	-	-	SP3/0P-1E
	400 mm	plastic	●	-	-	-	-	SP7/0N-0E	SP7/0P-0E
	800 mm			-	-	-	-	-	SP8/0P-0E
	metallic			-	-	-	-	-	SP8/0P-1E
	through-beam			14 m	plastic	emitter receiver with check	SPH/00-0E		
-	-	-	-				SPZ/0N-0E	SPZ/0P-0E	
metallic	emitter	SPH/00-1E							
8 m		plastic	SPU/00-0E						
3 m		metallic	SPU/00-1E						

available models

cable exit photoelectric sensors radial optic

function	distance	housing	adjustment	3 wires LO NPN	3 wires LO PNP	3 wires DO NPN	3 wires DO PNP	3 wires NPN LO/DO	3 wires PNP LO/DO
diffuse reflection	100 mm	metallic	●	-	-	SP3/DN-1A	-	-	-
	400 mm	plastic		-	-	-	-	SP7/0N-0A	SP7/0P-0A
		metallic		-	-	-	-	SP7/0N-1A	SP7/0P-1A
through-beam	14 m	plastic	emitter	SPH/00-0A					
			em. with check	SPH/X0-0A					
			receiver	-	-	-	-	SPZ/0N-0A	SPZ/0P-0A
		metallic	emitter	SPH/00-1A					
			em. with check	SPH/X0-1A					
			receiver	-	-	-	-	SPZ/0N-1A	SPZ/0P-1A
	3 m		emitter	SPU/00-1A					



technical specification

background suppression models

	SS0/**-**	SS1/**-**	SST/**-**
nominal sensing distance	50 mm	100 mm	12/25 mm
emission	red (660 nm)		
spot diameter	see diagram		
minimum detectable object	1 mm	3.5 mm	0.1 mm with STF-12 0.25 mm with STF-25
differential travel	≤ 10 %		
repeatability	5 %		
operating voltage	10...30 Vdc		
ripple	≤ 10 %		
supply current	≤ 30 mA		
load current	100 mA		
leakage current	10 µA		
output voltage drop	1.2 V max. IL = 100 mA		
output type	NPN or PNP - LO/DO selectable		
switching frequency	1 kHz		
power on delay	200 ms		
power supply protections	polarity reversal, transient		
output protection	short circuit (autoreset)		
operating temperature range	- 25°C...+ 70°C (without freeze)		
temperature drift	10 % Sr		
protection degree	IP67 (EN60529) ⁽¹⁾		
EMC	in conformity with the EMC Directive according to EN 60947-5-2		
external light interference	3,000 lux (incandescence lamp) 10,000 lux (sunlight)		
LEDs	yellow		
housing material	PBT (plastic) / nicked plated brass (metallic) / PC (cable exit)		
optic material	plastic		
tightening torque	25 Nm (metallic housing), 1 Nm (plastic housing)		
weight (approx)	plastic version: 30 g connector / 70 g cable metallic version: 100 g connector / 130 g cable		

⁽¹⁾ Protection guaranteed only with plug cable well mounted

	diffuse reflection				retro-reflective	polarized
	S*2/**_**	S*3/**_**	S*7/**_**	S*8/**_**	S*C/**_****	S*P/**_****
						
nominal sensing distance	with white target 100 x 100 mm		400 mm with white target 200 x 200 mm	800 mm with white target 400 x 400 mm	5 m with reflector RL 110	4 m with reflector RL 110
emission	infrared (880 nm)					red (660 nm)
dfferential travel	≤ 10 %					
repeatability	5 %					
operating voltage	10...30 Vdc					
ripple	≤ 10 %					
supply current	30 mA					
load current	100 mA					
leakage current	10 µA					
output voltage drop	1.2 V max. IL = 100 mA					
output type	NPN or PNP - LO/DO selectable					
switching frequency	250 Hz					
power on delay	200 ms					
power supply protections	polarity reversal, transient					
output protection	short circuit (autoreset)					
sensibility adjustment	-	●			-	●
operating temperature range	- 25°C...+ 70°C (without freeze)					
temperature drift	10 % Sr					
protection degree	IP67 (EN60529) ⁽¹⁾					
EMC	in conformity with the EMC Directive according to EN 60947-5-2					
external light interference	3,000 lux (incandescence lamp), 10.000 lux (sunligh)					
LEDs	yellow					
housing material	PBT (plastic) / nicked plated brass / PC (cable exit)					
optic material	plastic					
tightening torque	1 Nm (plastic housing), 25 Nm (metal housing)					
weight (approx)	plastic version: 30 g connector / 70 g cable metallic version: 100 g connector / 130 g cable					

⁽¹⁾ Protection guaranteed only with plug cable well mounted



technical specification

through beam models

M18 DC with lateral
adjustment

	standard beam			barrier for small and ultra-small objects		
	emitter	receiver	receiver	emitter	receiver	receiver
	S*H/*0-**	S*Z/**_**	S*D/**_**	S*U/*0-**	S*G/**_**	S*V/**_**
nominal sensing distance	14 m			-	8 m	3 m
minimum detectable object	-				Ø 4 mm	Ø 1 mm
emission	red (660)					
tolerance	-			90% - 200% @ Eg = 1,5		
dfferential travel	≤ 10 %					
repeatability	5 %					
operating voltage	10...30 Vdc					
ripple	≤ 10 %					
supply current	40 mA	30 mA		25 mA	20 mA	
load current	100 mA					
leakage current	10 µA					
output voltage drop	2.5 V max. IL = 100 mA					
output type	NPN or PNP - LO/DO selectable			NPN or PNP - NO or NC		
switching frequency	250 Hz					
power on delay	200 ms					
power supply protections	polarity reversal, transient					
output protection	short circuit (autoreset)					
sensibility adjustment	-	●	-			
operating temperature range	- 25°C...+ 75°C (without freeze)					
temperature drift	10 % Sr			≤ 10 % Sr		
protection degree	IP67 (EN60529) ⁽¹⁾					
EMC	in conformity with the EMC Directive according to EN 60947-5-2					
external light interference	3,000 lux (incandescent lamp), 10,000 lux (sunlight)					
LEDs	yellow			red (activated output)		
housing material	PBT (plastic) / nicked plated brass / PC (cable exit)					
optic material	plastic					
tightening torque	1 Nm (plastic housing), 25 Nm (metallic housing)					
weight (approx)	plastic version: 30 g connector / 70 g cable metallic version: 100 g connector / 130 g cable					

⁽¹⁾ Protection guaranteed only with plug cable well mounted

S**/0N-**	S**/0P-**	S**/*N-** (3 wires NPN)
S**/*P-** (3 wires PNP)	S**/00-**	S**H/X0-**

- BN brown
- BU blue
- BK black
- WH white
- PK pink
- GY grey

plug

M12 diffuse reflection polarized receiver	M12 emitter with check	M12 emitter without check




M18 DC with lateral adjustment


response diagrams

background suppression models


SS0/**-** excess gain

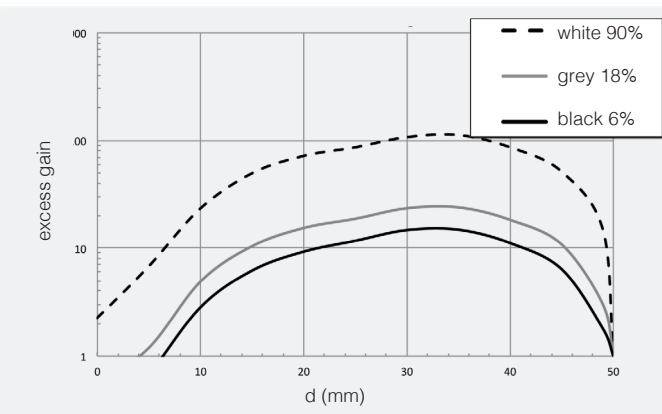


SS0/**-** spot dimension

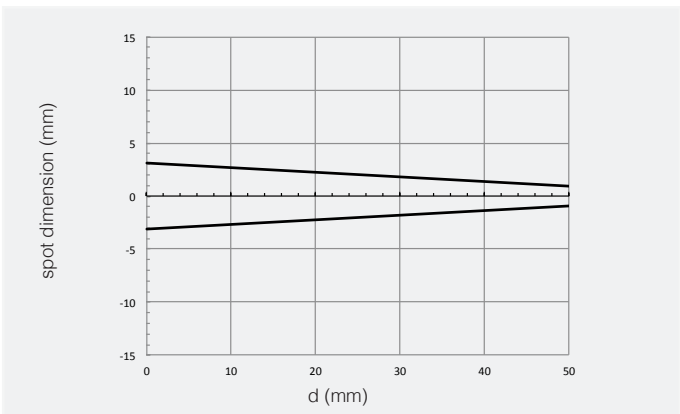


SS0/**-** parallel displacement

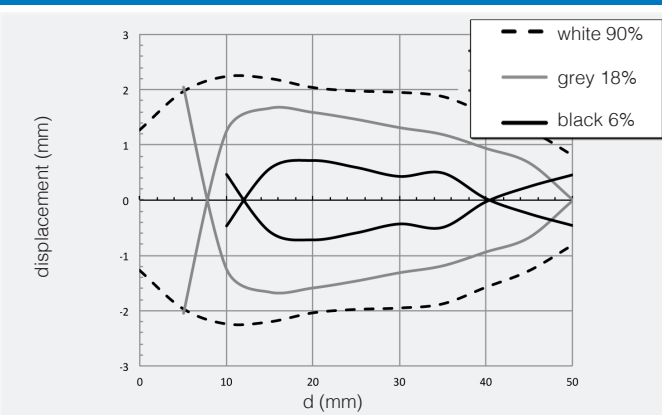


SS1/**-** excess gain

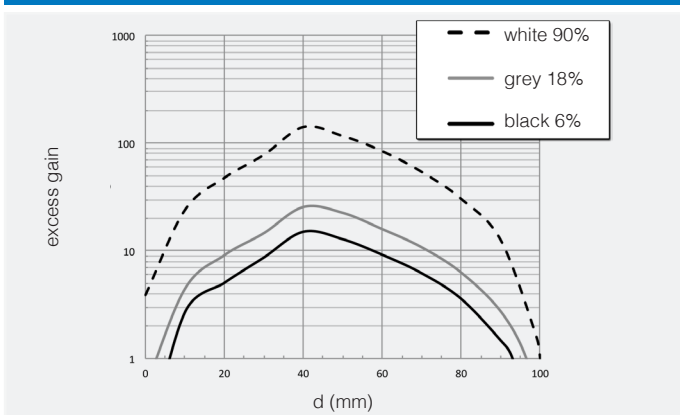


SS1/**-** spot dimension

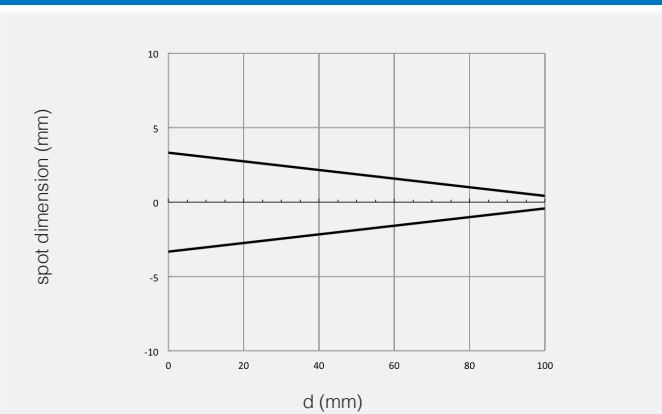


SS1/**-** parallel displacement

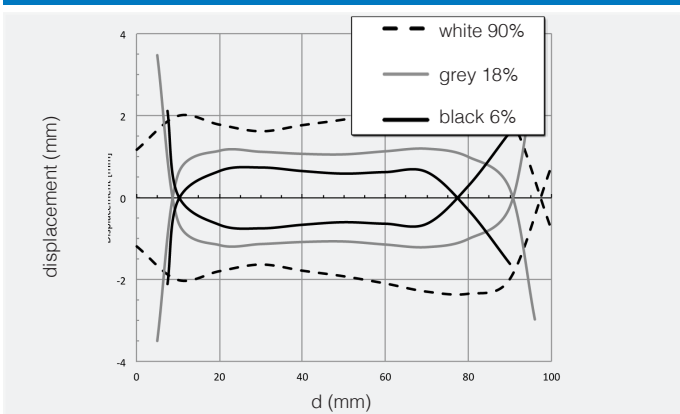

S*T/**-** + STF-12 excess gain

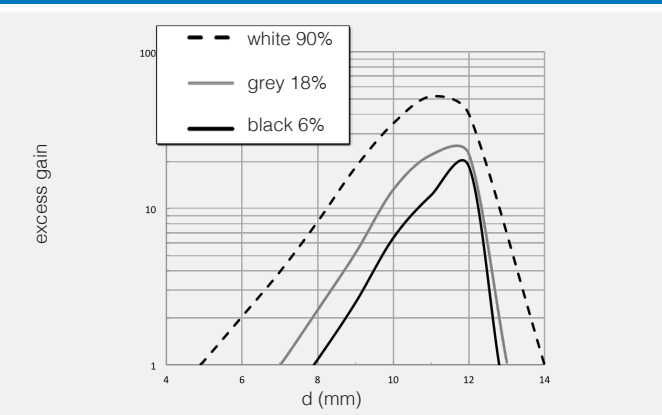


S*T/**-** + STF-12 spot dimension

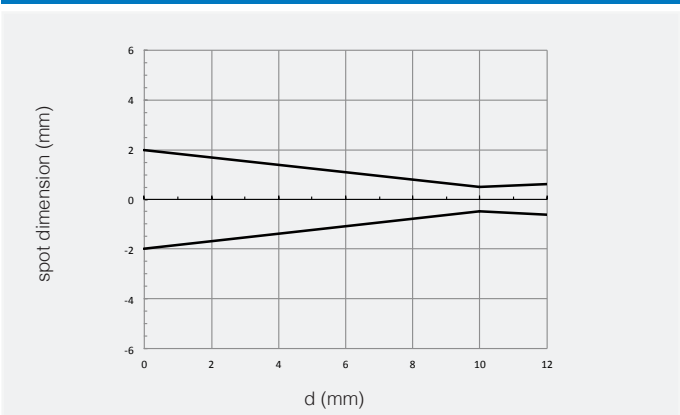


SS - SP




S*T/**-** + STF-12 parallel displacement

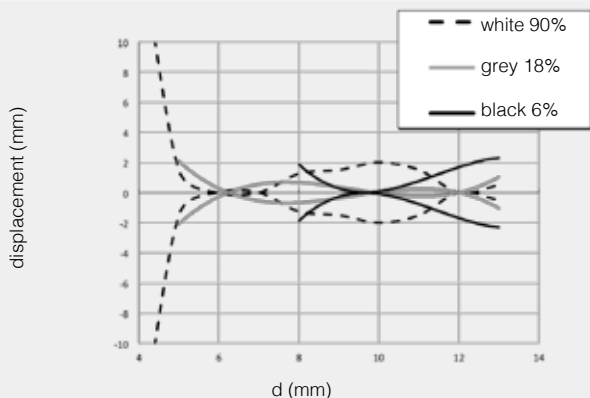


S*T/**-** + STF-25 excess gain

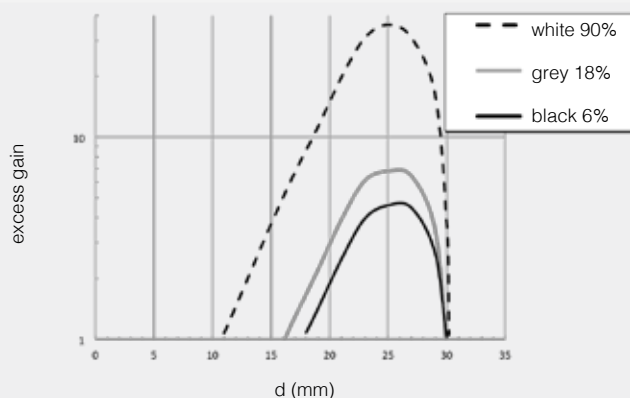

S*T/**-** + STF-25 spot dimension

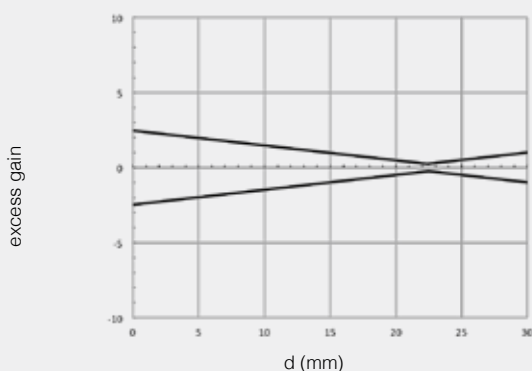


S*T/**-** + STF-25 parallel displacement

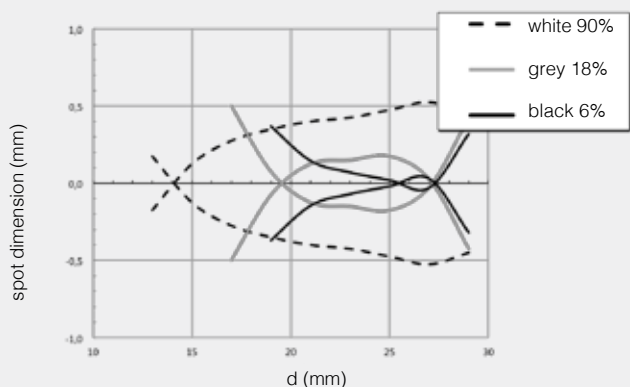


response diagrams

retro-reflective models


SS2,SS3/**-** excess gain

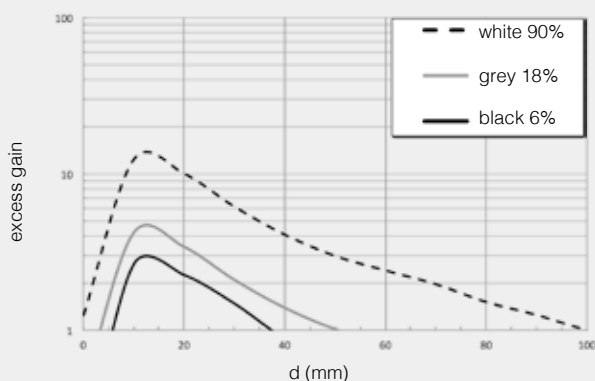


SS2,SS3/**-** spot dimension

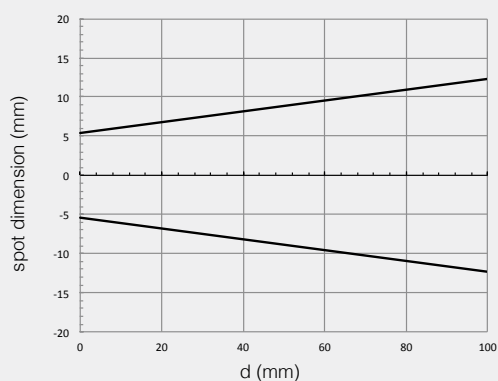

SS2,SS3/**-** parallel displacement

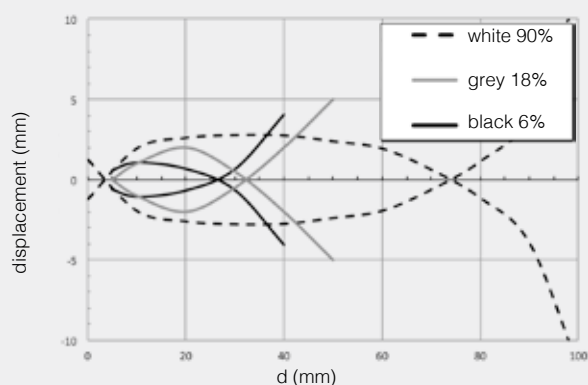

SS6,SS7/**-** excess gain

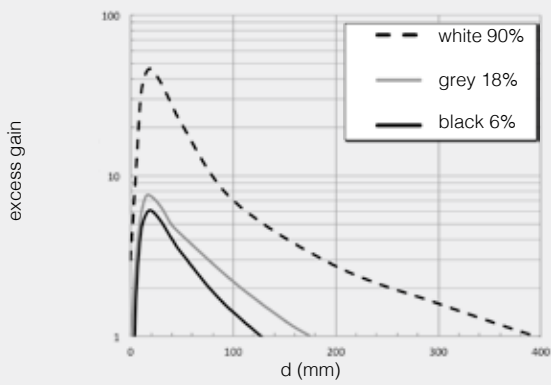




M18 DC with lateral
adjustment


response diagrams

retro-reflective models


SS6/**-**,SS7/**-** spot dimension

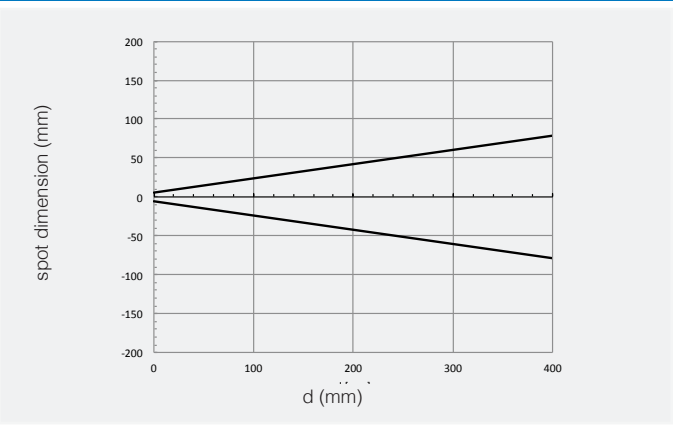


SS6/**-**,SS7/**-** parallel displacement

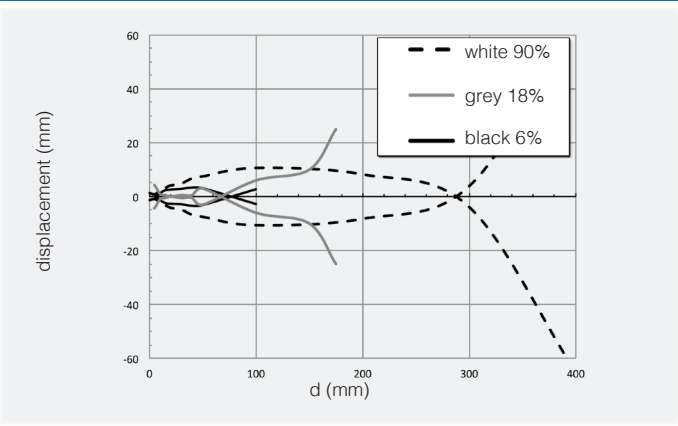


SS8/**-** excess gain

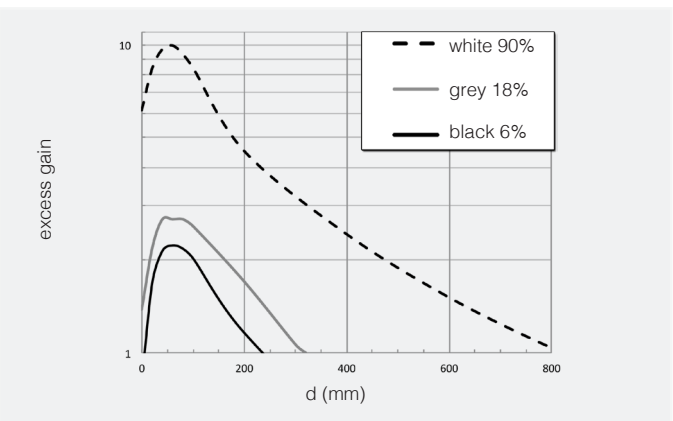

SS8/**-** spot dimension

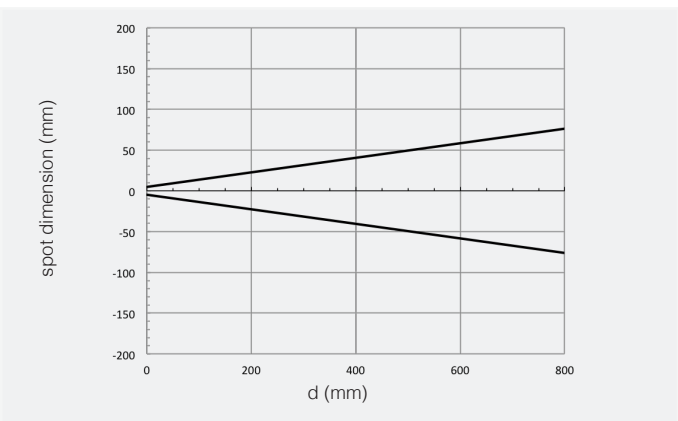

SS8/**-** parallel displacement

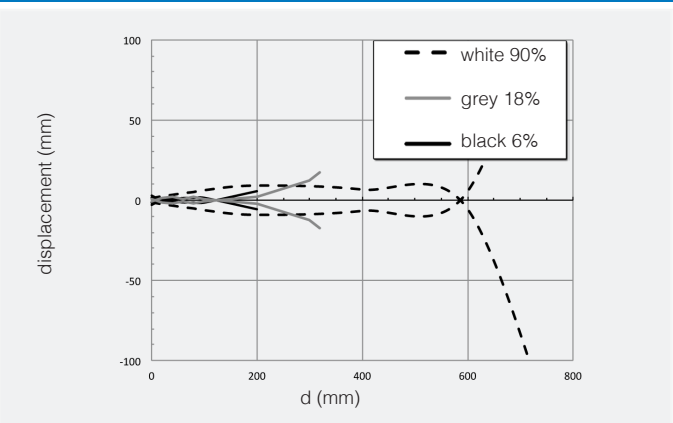


response diagrams

retro-reflective models (diagrams measured using RL100)




M18 DC with lateral
adjustment


SSC/**-**-** excess gain

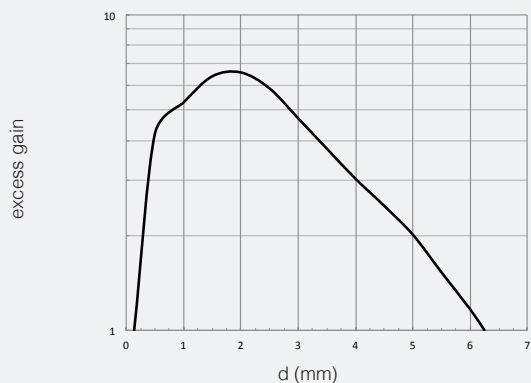

SSC/**-**-** spot dimension

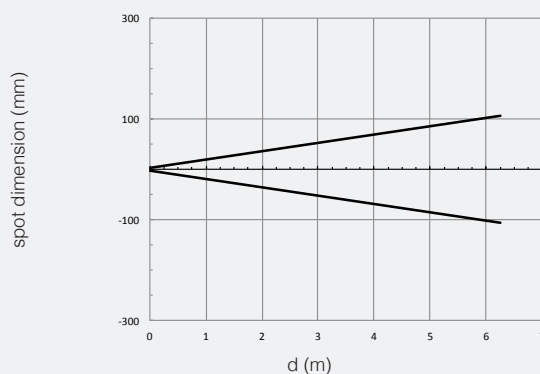


SSC/**-**-** parallel displacement

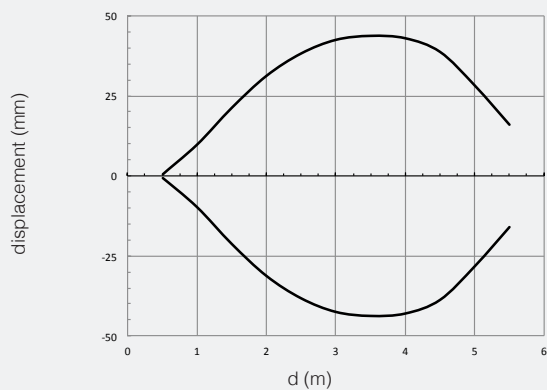


response diagrams

polarized models (diagrams measured using RL100)

S*P/**-**-** excess gain

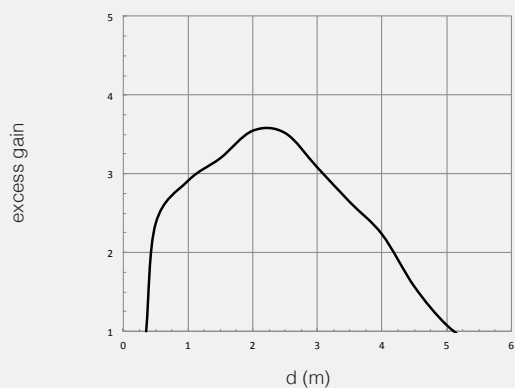

S*P/**-**-** spot dimension

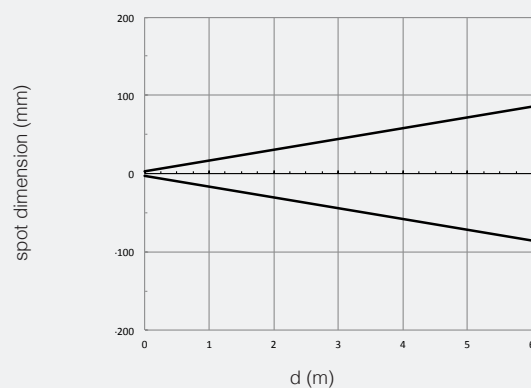


SS - SP



M18 DC with lateral
adjustment





response diagrams

polarized models (diagrams measured using RL100)

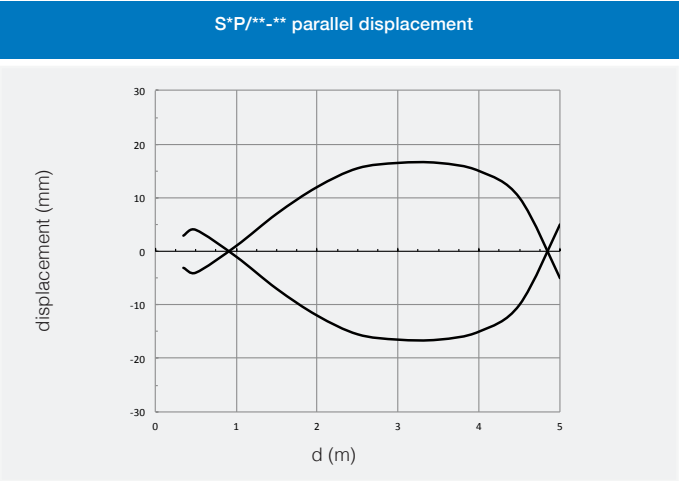

response diagrams


through beam models

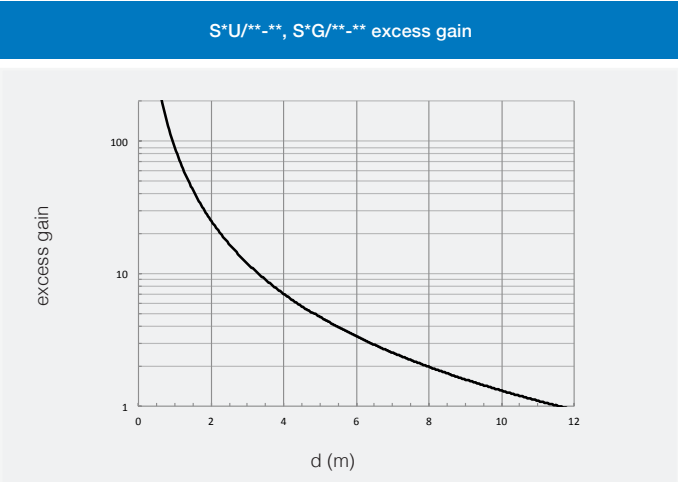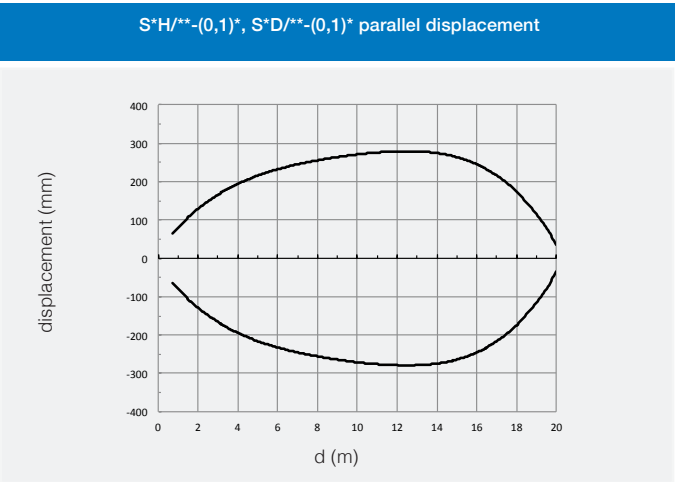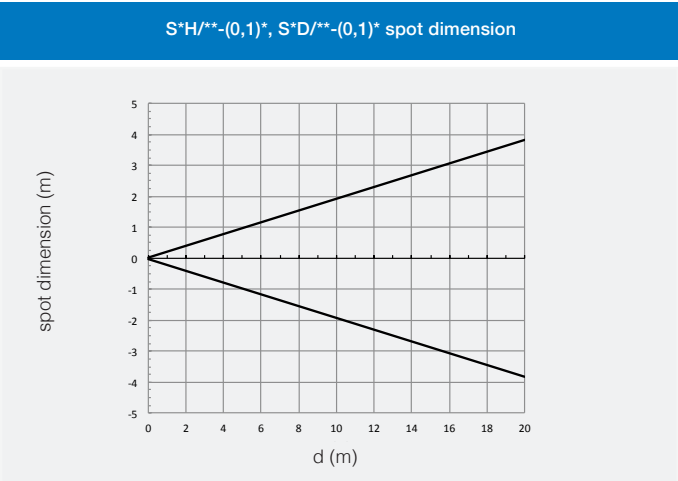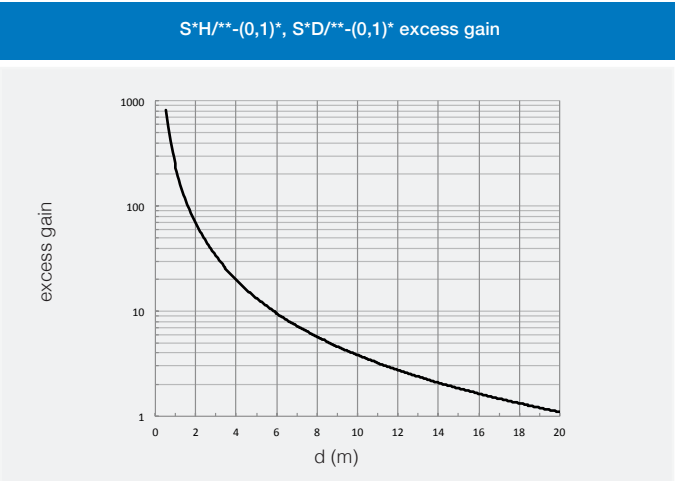


SS - SP




$S^*U/^{**}_{-}^{**}$, $S^*G/^{**}_{-}^{**}$ spot dimension

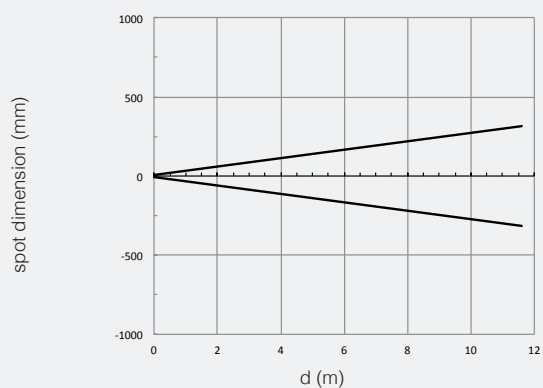


$S^*U/^{**}_{-}^{**}$, $S^*G/^{**}_{-}^{**}$ parallel displacement

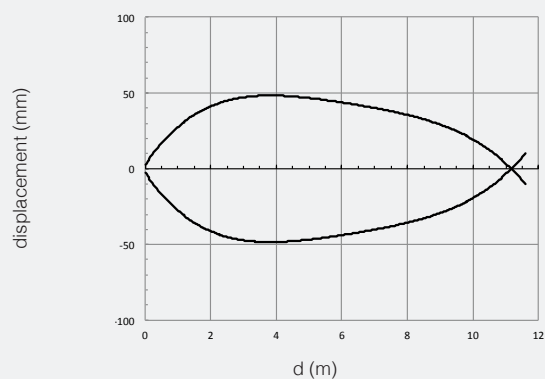


$S^*U/^{**}_{-}^{**}$ $S^*V/^{**}_{-}^{**}$ excess gain

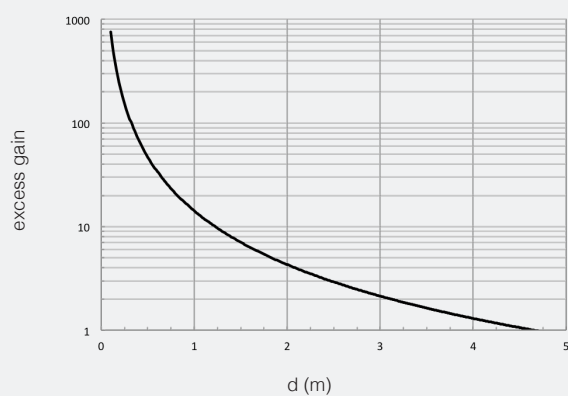

$S^*U/^{**}_{-}^{**}$ $S^*V/^{**}_{-}^{**}$ excess gain

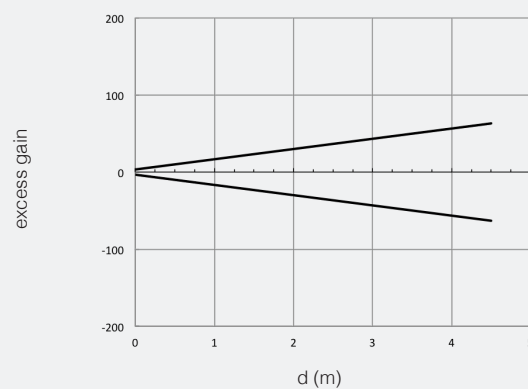



$S^*U/^{**}_{-}^{**}$ $S^*V/^{**}_{-}^{**}$ spot dimension

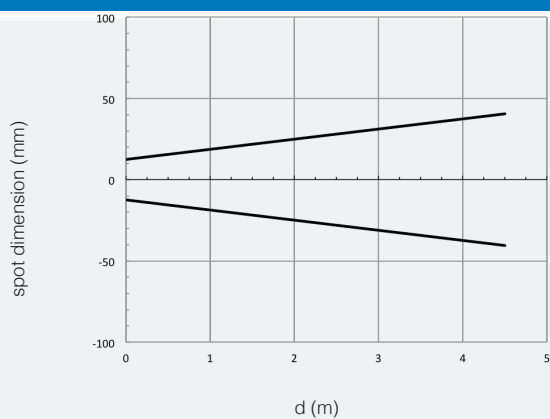



dimensions (mm)

M18 DC with lateral
adjustment

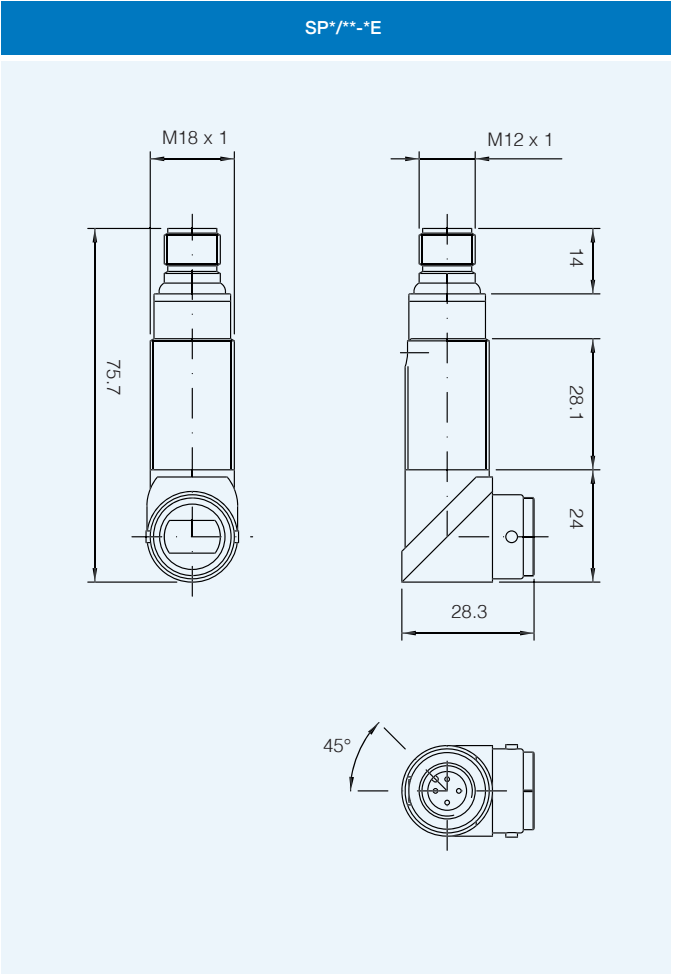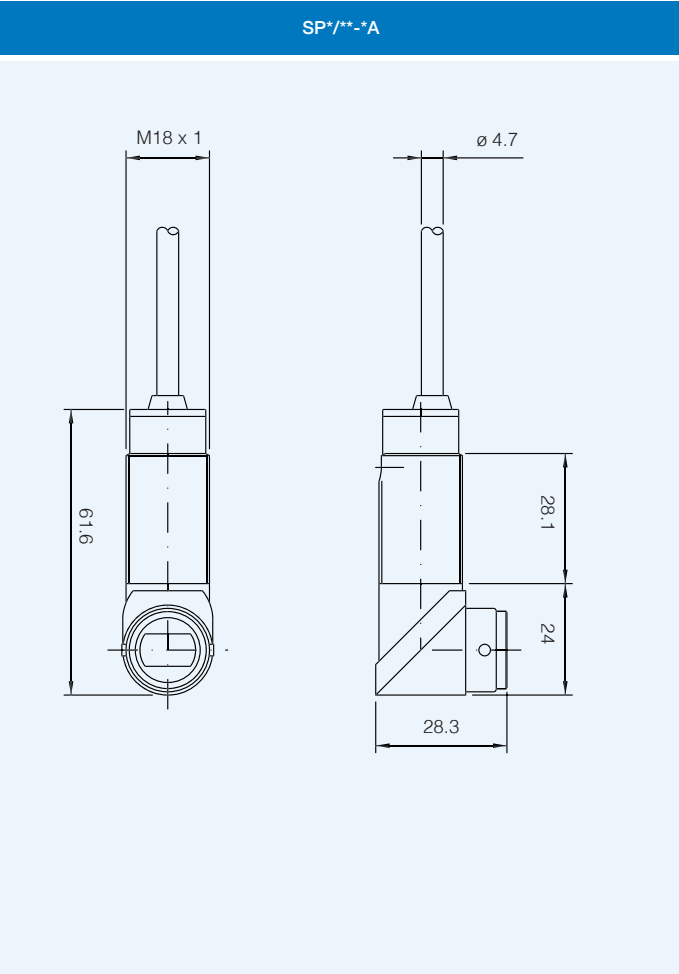


dimensions (mm)

SS*/**-*A	SS*/**-*E

dimensions (mm)

accessories included in all plastic models

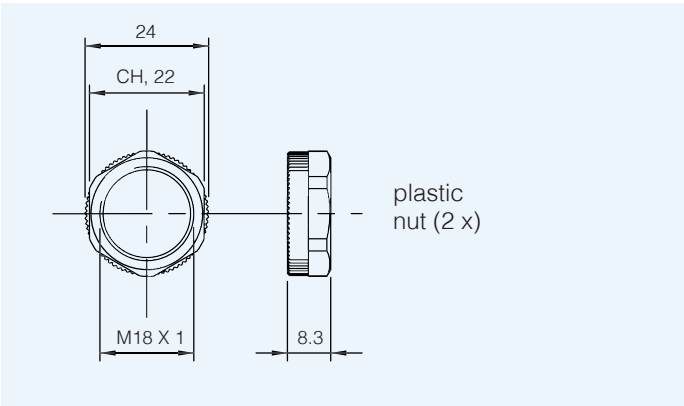

dimensions (mm)

accessories included in all metallic models

