


2 / 2 NC



2-WAY SOLENOID PILOT VALVES

Item	A	Max flow rate	Level of vacuum		Reaction time		Mouth	Cross-section of passage	B	E	H	I	Weight
	Ø	m³/h	abs. mbar	min max	msec	energ. de-energ.	Ø	mm²					g
07 01 20	G1/4"	4	1000	0.5	15	8	6	28.3	73	86	25	67	244

Note: The coil and the connector are not integral parts of the solenoid pilot valve and, therefore, must be ordered separately (See accessories for solenoid valves).


Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$


Adapters for GAS - NPT threading available on page 1.130



2-WAY VACUUM SOLENOID PILOT VALVES

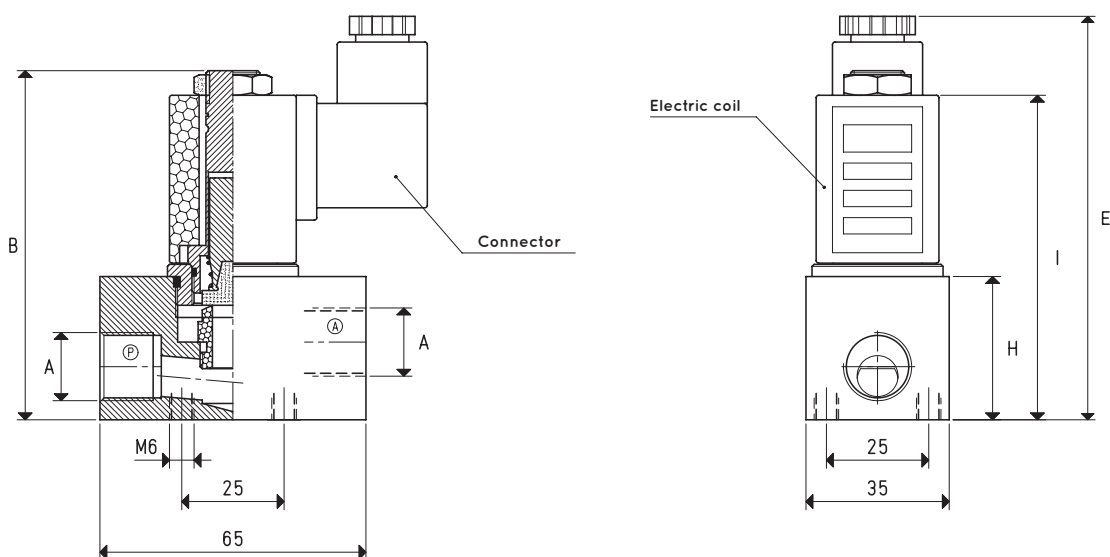

2 / 2 NC



2-WAY SOLENOID PILOT VALVES

Item	A	Max flow rate	Level of vacuum		Reaction time		Mouth	Cross-section of passage	B	E	H	I	Weight
	Ø	m³/h	abs. mbar	min	max	msec	energ. de-energ.	Ø	mm²				g
07 02 20	G3/8"	8	1000	0.5		22	10	10	78.5	85	98	35	384
07 03 20	G1/2"	10	1000	0.5		28	10	12	113.0	85	98	35	372

Note: The coil and the connector are not integral parts of the solenoid pilot valve and, therefore, must be ordered separately (See accessories for solenoid valves).

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$

Adapters for GAS - NPT threading available on page 1.130