

Distance Sensor

UMD123U035

Part Number



- Digital and analog output
- Stainless steel housing
- Synchronous mode
- Temperature drift eliminable

These ultrasonic sensors evaluate the sound reflected from the object. They detect almost any object regardless of the material and its condition. Thanks to the innovative transducer, this sensor has a particularly wide sonic cone at close range. This allows a very wide range of pieces to be reliably detected on conveyor belts. The sensor can only be used in reflex mode operation.



Technical Data

Ultrasonic Data	
Working Range	100...1200 mm
Measuring Range	1100 mm
Reproducibility maximum	2 mm
Linearity Deviation	7 mm
Resolution	0,2 mm
Ultrasonic Frequency	225 kHz
Opening Angle	< 12 °
Service Life (T = +25 °C)	100000 h
Switching Hysteresis	10 mm
Electrical Data	
Supply Voltage	18...30 V DC
Current Consumption (Ub = 24 V)	< 30 mA
Switching Frequency	7 Hz
Response Time	72 ms
Temperature Range	-30...60 °C
Number of Switching Outputs	1
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	100 mA
Analog Output	0...10 V
Synchronous Mode	up to 40 sensors
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Interface	IO-Link V1.0
Protection Class	III
Mechanical Data	
Setting Method	Teach-In
Housing Material	Stainless Steel
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4/5-pin
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	829,12 a
PNP NO/NC switchable	●
Analog Output	●
IO-Link	●
Connection Diagram No.	182
Control Panel No.	D12
Suitable Connection Equipment No.	2 35
Suitable Mounting Technology No.	150

Complementary Products

Analog Evaluation Unit AW02
Baffle Plate Z0021, Z0022
IO-Link Master
PNP-NPN Converter BG2V1P-N-2M
Software

Ctrl. Panel

D12




01 = Switching Status Indicator
06 = Teach Button
79 = Run/Error Indicator

1 = Sensing Face

All dimensions in mm (1 mm = 0.03937 Inch)

182




Legend

+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted	ENB	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK
ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	Amv	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
Bl_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENARS422	Encoder A/A (TTL)		

Characteristic response curve

Characteristic curves show the position of the center of the measured object (100 × 100 mm plate) at the time of switching.

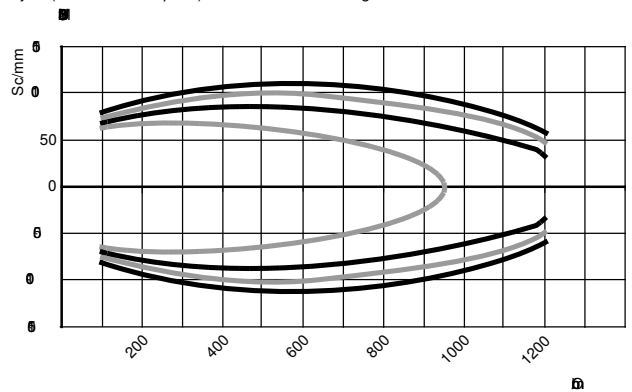

Ob = Object

Sc = Sonic cone width

Standard

Medium-width

Narrow

Extra-narrow

