


Part number: **FTQ000225** Model: **FTPS-CBE+CBR NPN H1C**



Dimension in mm

1. TECHNICAL CHARACTERISTICS

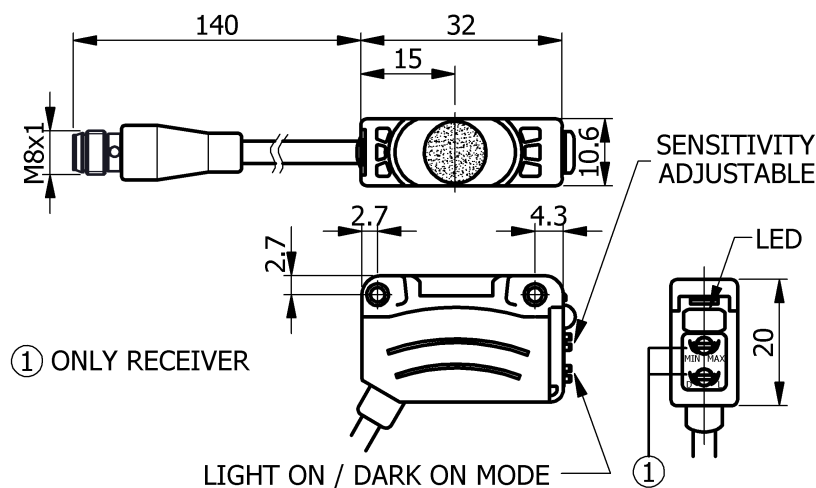

Detection type		
Function principle:		Through-beam
Electrical data		
Power supply type:		Direct current
Working voltage:	[V]	12 ÷ 24
Current consumption:	[mA]	< 30
Protection class:		II
Reverse polarity protection:		Present
Time delay before availability:	[ms]	1 ms
Type of light emitted:		Red
Wave length:	[nm]	660 nm
Noise immunity test:		± 240 V - Noise waveform: square. Impulse duration: 1us
Dielectric strength:	[Vac]	1000 50÷60 Hz for 1 minut
Outputs		
Electrical design:		NPN (Receiver)
Function:		Light-on/Dark-on mode (Programmable for receiver only)
Max voltage drop:	[V]	1
Max output current:		100
Short circuit protection:		Presente
Type of short-circuit protection:		Impulsive
Overload protection:		Present
Detection zone		
Switching distance-Sn:	[cm]	1000
Sensing target:		Opaque material
Min. sensing target:		Min. Ø 12mm



POSITION SENSORS

Miniature Photoelectric Sensors

Environmental conditions

Ambient temperature:	[°C]	Operating: -25 ÷ +55 Storage: -40 ÷ +70
Ambient illumination:	[lx]	Sunlight: < 11.000 Lux Incandescent lamp: < 3.000 Lux
Ambient humidity:	[% RH]	Operating: 35 ÷ +85 Storage: 35 ÷ +85
IP rating:		IP65
Vibration:		Amplitude: 1.5 mm at frequency of 10 ÷ 55Hz (for 1 min) Application direction: each X, Y, Z axis for 2 hours
Shock:		Amplitude: 500 m/s ² for 3 minuti Application direction: each asse X,Y,Z axis

Display and control elements

Display:	Output state: RED LED Stability: GREEN LED Power supply: RED LED (emitter only)
Sensitivity adjuster:	Present
Ligh ON/Dark ON operation mode switch:	Present

Mechanical data

Housing:	Parallelepiped
Dimensions:	32x20x10.6
Materials:	Housing: Polycarbonate+Acrylonitrile butadiene styrene - LED Cap: Polycarbonate - Sensing part: Polymethyl methacrylate.
Weigth:	[g] 45

Electrical connection


Connector:	H1 type - M8X1 - gold plated contacts + PVC cable 10 cm
------------	---


Compliance to Standards / Directives

Directives compliance:	2014/30/EU -Electromagnetic compatibility directive (EMC)
Standards compliance:	EN61000-6-2:2005 and EN61000-6-4:2007

2. NORME DI INSTALLAZIONE

WIRING DIAGRAM

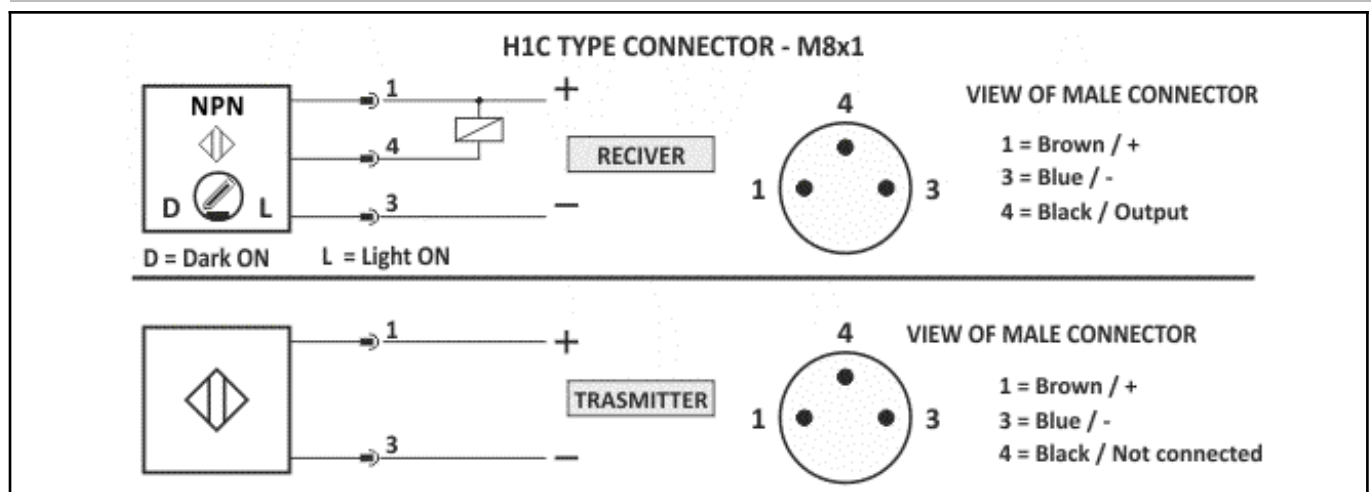

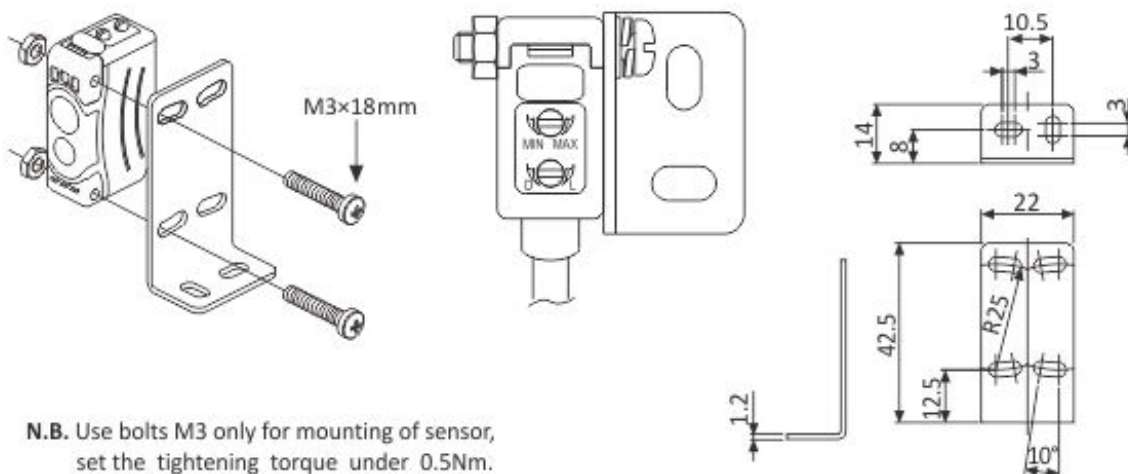INSTRUCTIONS FOR CORRECT INSTALLATION

N.B. Use bolts M3 only for mounting of sensor,
set the tightening torque under 0.5Nm.