



Part number: CLC000003 - Model: SC-A500 24Vac



Dimension in mm

TECHNICAL CHARACTERISTICS


Working voltage:	24 Vac
Output type:	AC Relay
Function:	Changeover relay
Max. output current:	5 A @ 220 Vac
Absorption:	2,5 VA
Housing material:	Aluminium
Temperature limits:	-20 ÷ +60 °C
IP rating:	IP 65
Weight:	2000 g
Threaded fixing:	1 1/2 inhc GAS
Max. tank pressure:	12 Kg / cmq
Bar lenght:	500




Part number: CLC000003 - Model: SC-A500 24Vac

WIRING DIAGRAM

REGOLAZIONE SENSIBILITA' E SCHEMI DI COLLEGAMENTO

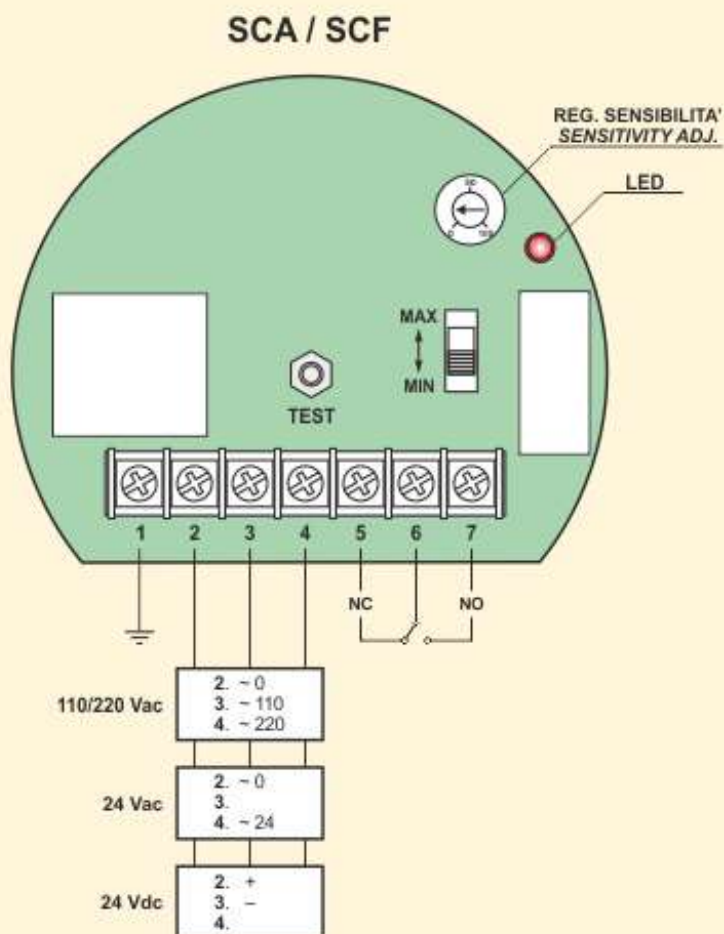


INSTRUCTIONS FOR CORRECT INSTALLATION

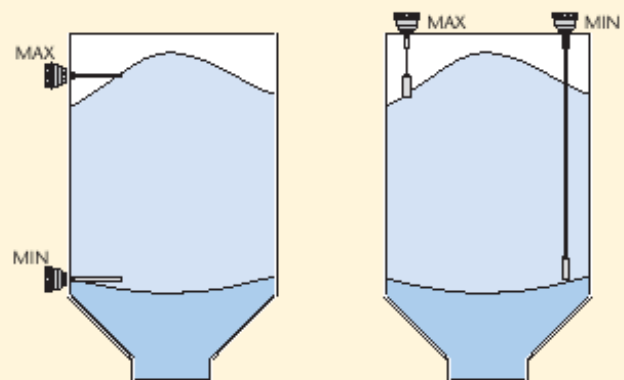

SC-A

TECHNICAL CHARACTERISTICS


Working voltage:		110 / 220 Vac
Output type:		AC Relay
Function:		Changeover relay
Max. output current:		5 A @ 220 Vac
Absorption:		2,5 VA
Housing material:		Aluminium
Temperature limits:		-20 ÷ +60 °C
IP rating:		IP 65
Weight:		2000 g
Threaded fixing:		1 1/2 inhc GAS
Max. tank pressure:		12 Kg / cmq
Bar lenght:		500




Part number: CLC000004 - Model: SC-A500 110/220Vac


WIRING DIAGRAM

REGOLAZIONE SENSIBILITA' E SCHEMI DI COLLEGAMENTO

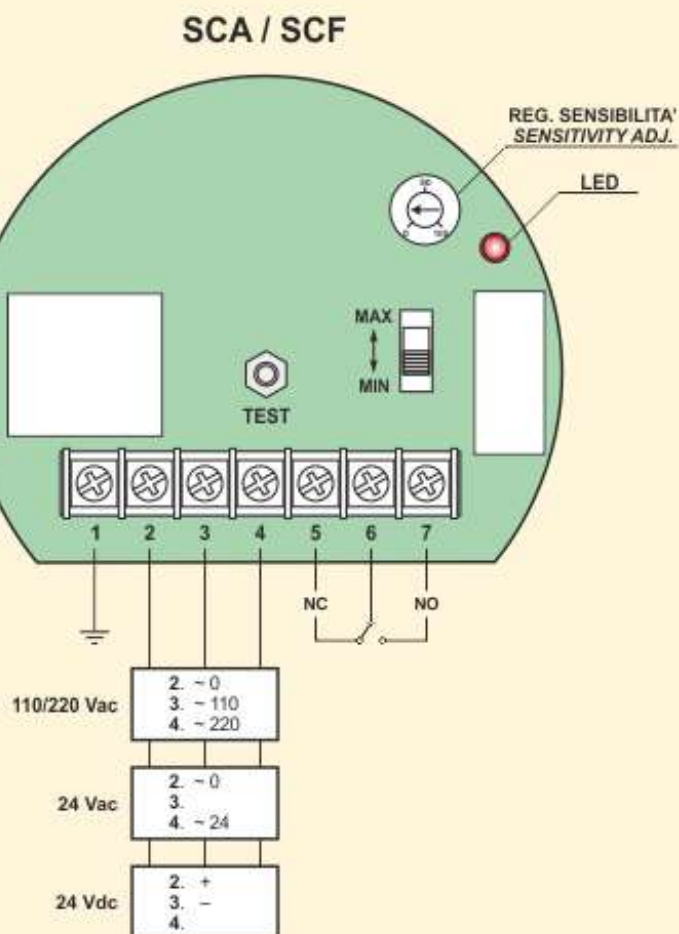

INSTRUCTIONS FOR CORRECT INSTALLATION

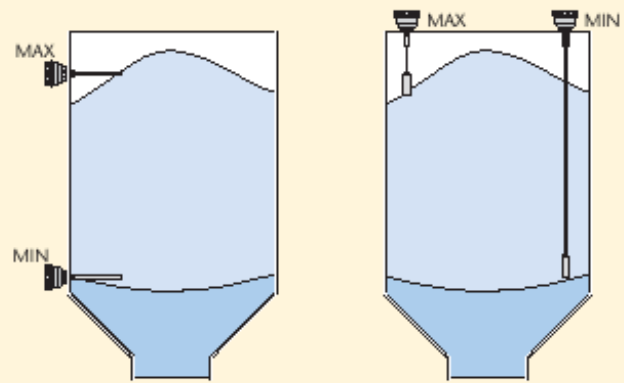




Part number: CLC000005 - Model: SC-A800 24Vac



Dimension in mm

TECHNICAL CHARACTERISTICS


Working voltage:	24 Vac
Output type:	AC Relay
Function:	Changeover relay
Max. output current:	5 A @ 220 Vac
Absorption:	2,5 VA
Housing material:	Aluminium
Temperature limits:	-20 ÷ +60 °C
IP rating:	IP 65
Weight:	2500 g
Threaded fixing:	1 1/2 inhc GAS
Max. tank pressure:	12 Kg / cmq
Bar lenght:	800




Part number: CLC000005 - Model: SC-A800 24Vac


WIRING DIAGRAM

REGOLAZIONE SENSIBILITA' E SCHEMI DI COLLEGAMENTO

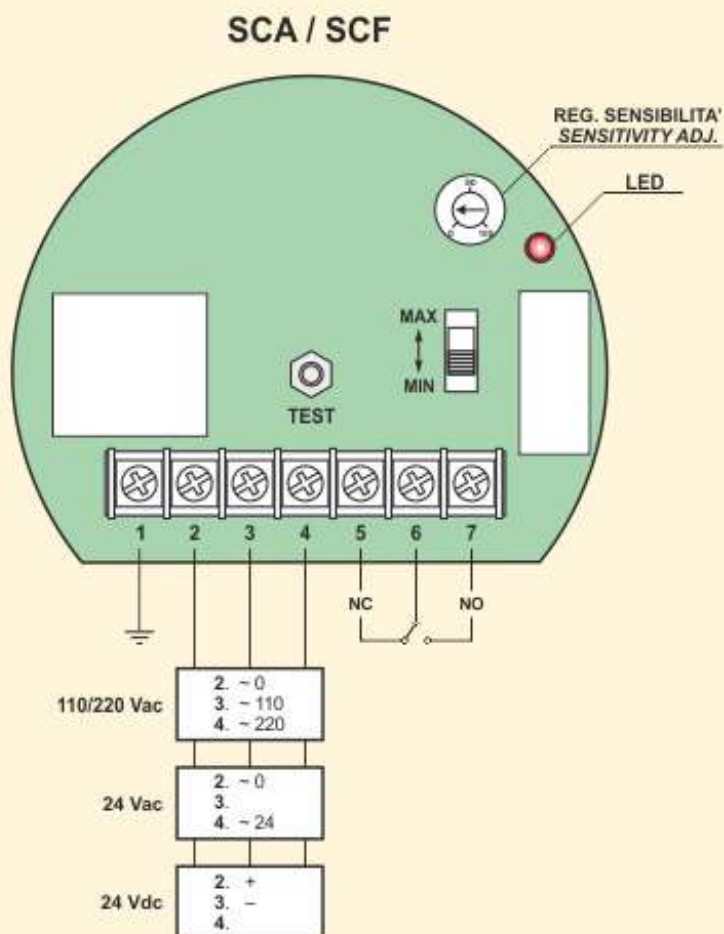

INSTRUCTIONS FOR CORRECT INSTALLATION

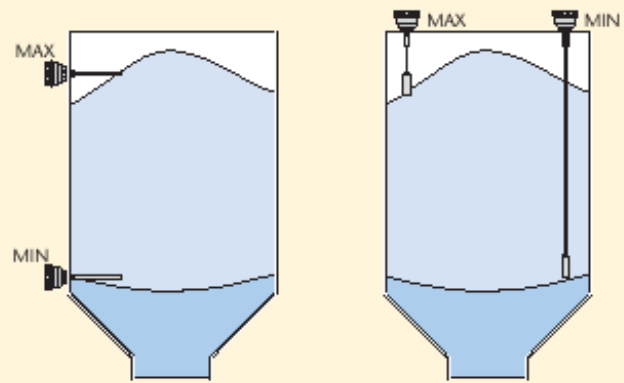




Part number: CLC000001 - Model: SC-A300 24Vac



Dimension in mm

TECHNICAL CHARACTERISTICS


Working voltage:	24 Vac
Output type:	AC Relay
Function:	Changeover relay
Max. output current:	5 A @ 220 Vac
Absorption:	2,5 VA
Housing material:	Aluminium
Temperature limits:	-20 ÷ +60 °C
IP rating:	IP 65
Weight:	1650 g
Threaded fixing:	1 1/2 inhc GAS
Max. tank pressure:	12 Kg / cmq
Bar lenght:	300




Part number: CLC000001 - Model: SC-A300 24Vac

WIRING DIAGRAM

REGOLAZIONE SENSIBILITA' E SCHEMI DI COLLEGAMENTO

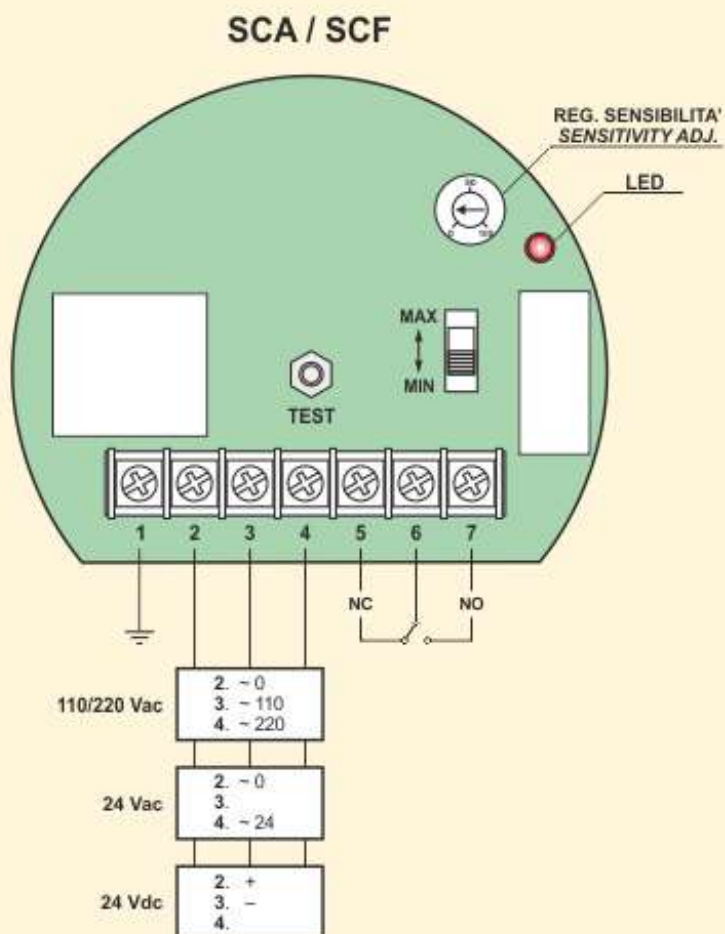


INSTRUCTIONS FOR CORRECT INSTALLATION

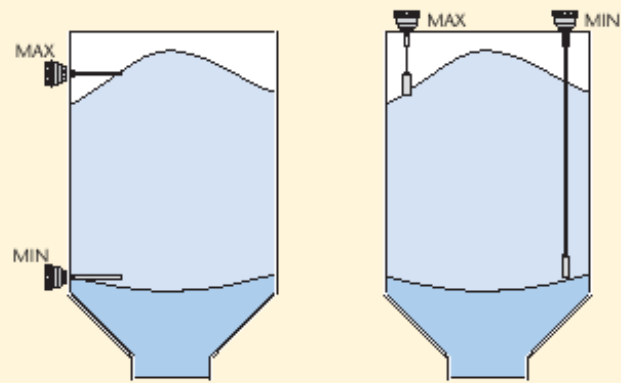

TECHNICAL CHARACTERISTICS


Working voltage:		110 / 220 Vac
Output type:		AC Relay
Function:		Changeover relay
Max. output current:		5 A @ 220 Vac
Absorption:		2,5 VA
Housing material:		Aluminium
Temperature limits:		-20 ÷ +60 °C
IP rating:		IP 65
Weight:		1650 g
Threaded fixing:		1 1/2 inhc GAS
Max. tank pressure:		12 Kg / cmq
Bar lenght:		300




Part number: CLC000002 - Model: SC-A300 110/220Vac

WIRING DIAGRAM

REGOLAZIONE SENSIBILITA' E SCHEMI DI COLLEGAMENTO

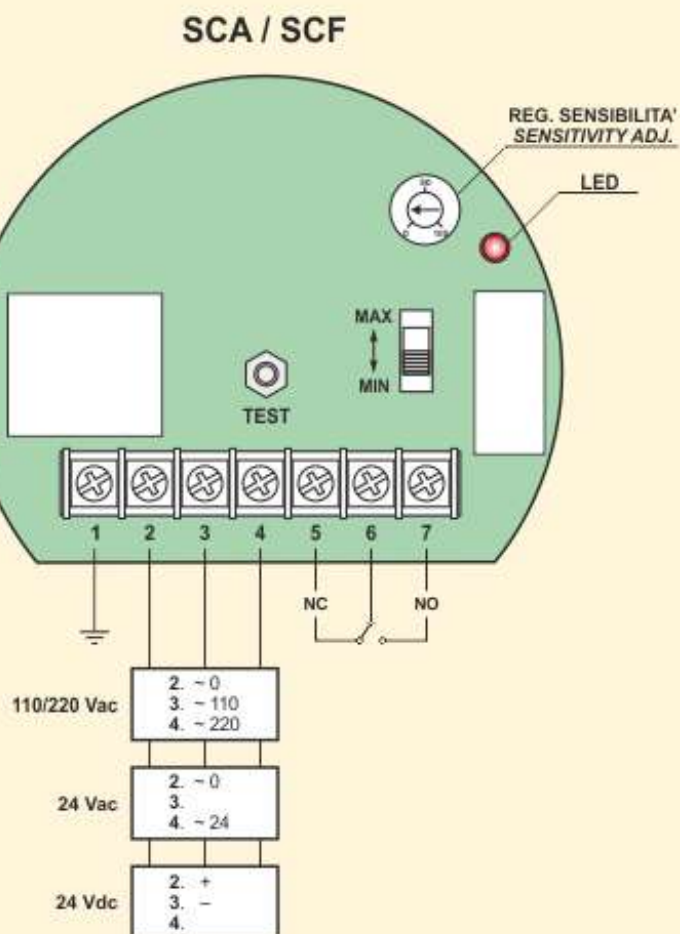


INSTRUCTIONS FOR CORRECT INSTALLATION

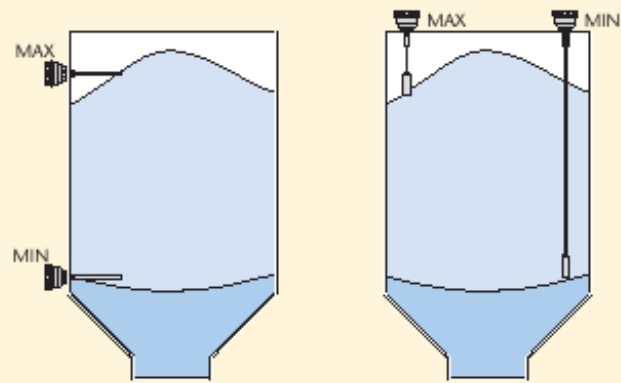

SC-A

TECHNICAL CHARACTERISTICS


Working voltage:		110 / 220 Vac
Output type:		AC Relay
Function:		Changeover relay
Max. output current:		5 A @ 220 Vac
Absorption:		2,5 VA
Housing material:		Aluminium
Temperature limits:		-20 ÷ +60 °C
IP rating:		IP 65
Weight:		2500 g
Threaded fixing:		1 1/2 inhc GAS
Max. tank pressure:		12 Kg / cmq
Bar lenght:		800



Part number: CLC000006 - Model: SC-A800 110/220Vac

WIRING DIAGRAM

REGOLAZIONE SENSIBILITA' E SCHEMI DI COLLEGAMENTO

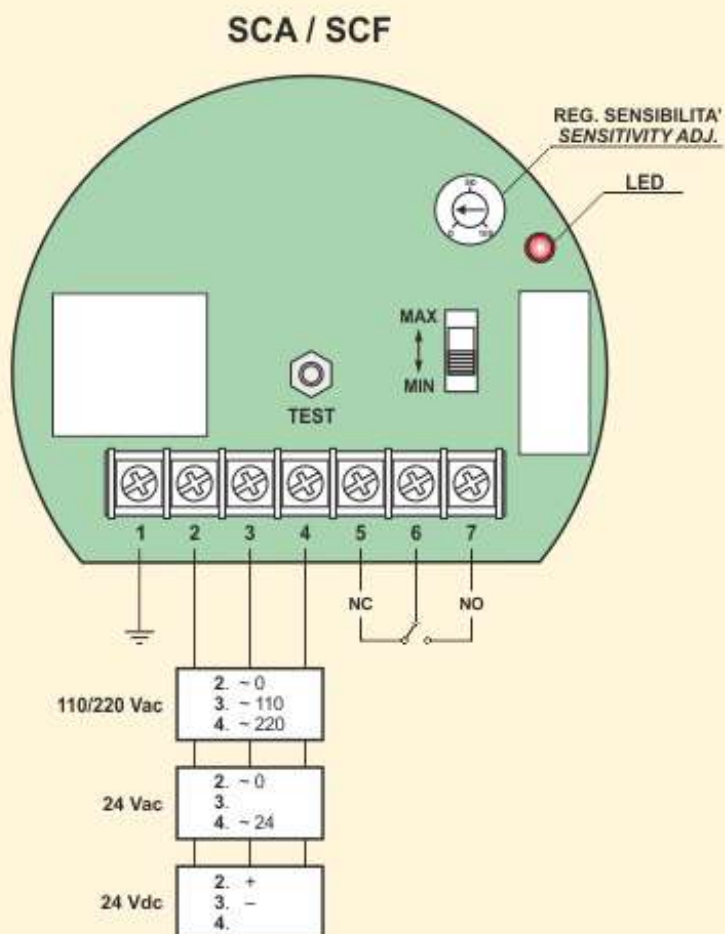

INSTRUCTIONS FOR CORRECT INSTALLATION

