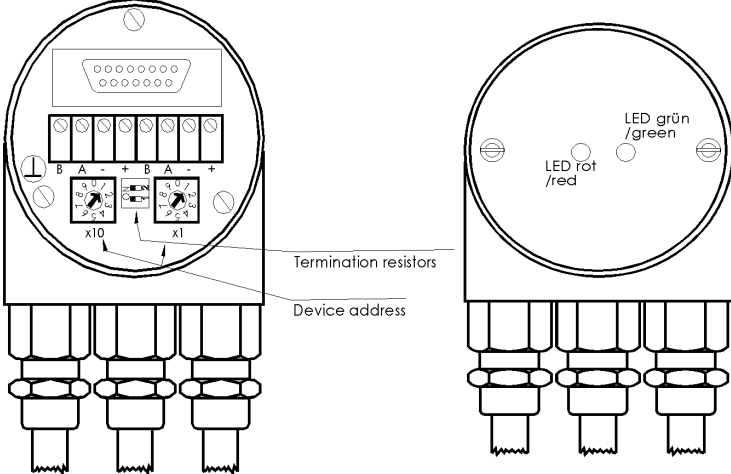


INTERFACE	CONNECTIONS
» (DP) Profibus-DP Class2 Programmable Parameters: Direction of rotation (complement); Resolution per revolution; Total resolution; Preset value; Output of velocity; Software Limit Switches.	» Internal/external views of the connection cap 3PG with 2 LEDs
»	
»	
»	

ORDERING INFORMATION

LENGTH

(10M) 10 m
 (15M) 15 m
 (20M) 20 m
 (25M) 25 m
 (30M) 30 m
 ()

(3PG) Connection cap IP65
 (3PG-VA) Stainl. steel conn. cap IP65
 (2M20) Conn. cap with 2 cables IP65
 ()
 ()
 ()
 ()
 ()

OPTIONS

MODEL

AF13P

10M

CODE

B

Binary

RESOLUTION

100

(100) 0,1 mm
 (1000) 1 mm

POWER SUPPLY

1030

CONNECTION

3PG

(P)

(S)

(U)

(X)

(B)

()

()

Product manufactured according to UNI EN ISO 9001:2000, supplied with CHECKING and CONFORMITY declaration with CE mark and with TWO (2) YEARS WARRANTY starting from delivery date.

COPYRIGHT by ELCIS - Collegno (TO)