


Sized draw standard version: CV

Measures without tolerance according to UNI ISO 2768-mk

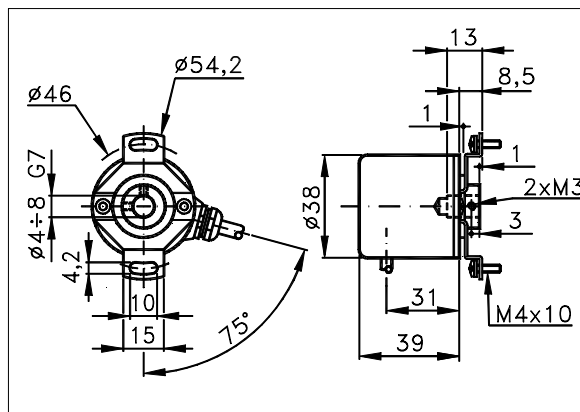

TECHNICAL FEATURES AND POSSIBLE CONFIGURATIONS

- Base.....: ALUMINIUM
- Cover.....: ALUMINIUM
- Weight.....: 100 g
- Shaft.....: Ø 8 STAINLESS STEEL
- Max.rad/axial load.: 1 kg
- IP output side.(°): see 'CONNECTION' of page 2
- IP shaft side..(°).> std. 64
opt. type (page 2).> standard
- Contin. max RPM(**)> 6000
- Starting torque gcm> 12


- Ball bearings life....: $1,5 \times 10^9$ revolutions
- Impact resistance....: 100 G x 6ms
- Vibration resistance..: 10 G (55 ÷ 2000 Hz)
- Power supply.....: 5÷30V (vedi pag.2)
- Operating temperature: -25÷85 °C
- Storage temperature...: -30÷85 °C
- N° of pulses/rev.....: 8 ÷ 2048
- Max consumptions mA...: std 50 line driver 90
- Max frequency.....: 600 kHz

(°) IP according to CEI EN 60529, EN 60529, IEC 529

(**) intermittent max RPM + 30% of continuous max RP

ELECTRONICS

CODE	DESCRIPTION	mA	CODE	DESCRIPTION	mA	CODE	DESCRIPTION	mA	CODE	DESCRIPTION	mA
N	DRIVER 26LS31	10									
Z	DRIVER ET7272	10 70 70									



Tolerance between phases $\pm 5\%$, symmetry $\pm 15^\circ$

(§) Clock-wise output rotation (see shaft).



Elcis encoder s.r.l. Via Rosa Luxembourg 12/14 10093 COLLEGNO (TO) ITALY
Phone: +39 011 715577/78 a.r.

* <http://www.elcis.com>
* e-mail: info@elcis.com
* Fax: +39 011 712613

